
EMSKE-L 25/18 EMV-S

Ex-EMC cable gland with contact spring insert, brass nickel-plated, M25, long





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material cable gland	Brass nickel-plated
Material clamping cage	Polyamide
Material sealing gasket	EPDM
Material earthing insert	Stainless steel 1.4310
Temp. range min	-40 °C
Temp. range max	75 °C
Protection class	IP66 / IP68 (5 bar 30 min)
Type of protection	Ex eb, Ex tb
Ex-Certificate	IECEx, ATEX
Thread type	M
Ø Connection thread D	25
Lead	1,5
Length screw-in thread L	18 mm
Ø cable diameter min	10 mm
Ø cable diameter max	17 mm
Ø cable below cable shield max	16 mm
Key width SW	29 mm
Collar diameter (E)	32 mm
Total length TL	44 mm - 53 mm
Install. torques fitting	10 N m
Install. torques cap nut	10 N m
Surface	Nickel-plated
Order no. nickel-plated	10113970
Type	EMSKE-L 25/18 EMV-S
Packing unit	50

Your Contact:
WISKA America SRL
Mr. Alexander Bauer · Cervantes 911 c/Venezuela · Asunción · Paraguay
☎ +595-992-921719 · 🖷 +49-4191-508-129
a.bauer@wiska.de · www.wiska.lat


Other technical data on request / subject to change without notice

Tariff number	85369010
EAN number	4007686106725

03.11.2026

Your Contact:
WISKA America SRL
Mr. Alexander Bauer · Cervantes 911 c/Venezuela · Asunción · Paraguay
☎ +595-992-921719 · 🖷 +49-4191-508-129
a.bauer@wiska.de · www.wiska.lat

Other technical data on request / subject to change without notice

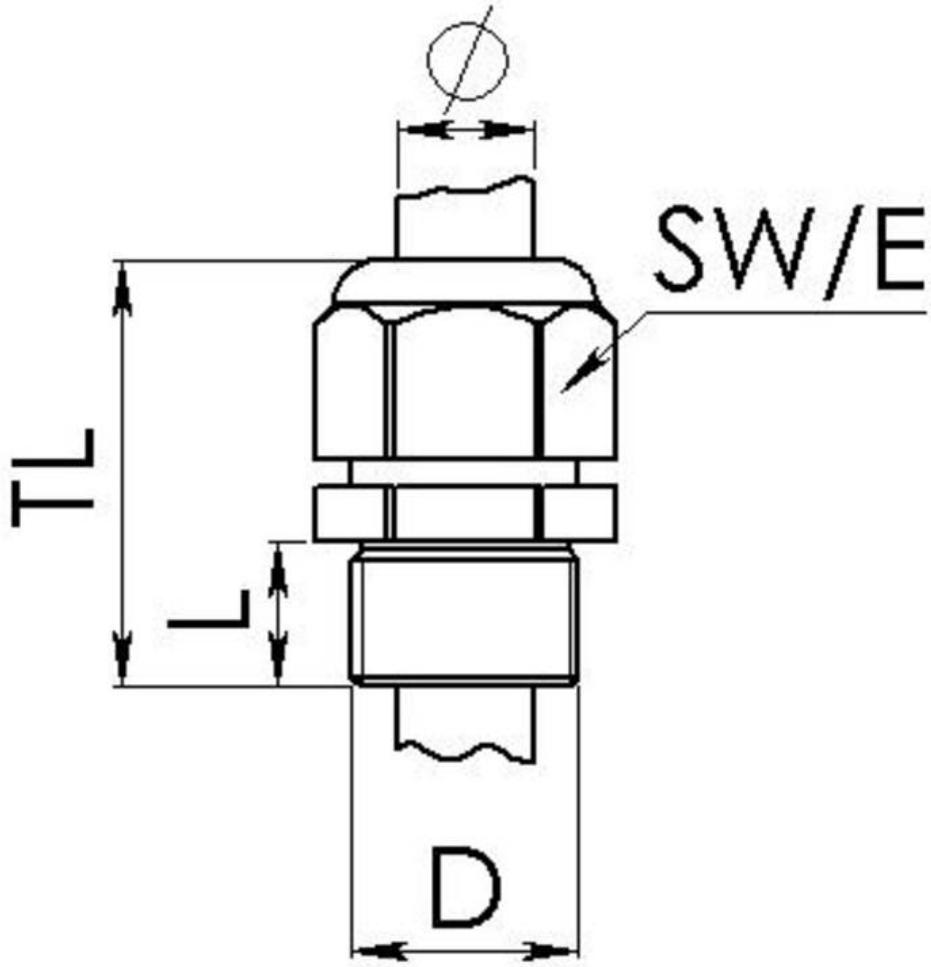

Your Contact:
WISKA America SRL
Mr. Alexander Bauer · Cervantes 911 c/Venezuela · Asunción · Paraguay
☎ +595-992-921719 · 🖷 +49-4191-508-129
a.bauer@wiska.de · www.wiska.lat

Other technical data on request / subject to change without notice