

VMSKV-B 24-07



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



Material cable gland	Brass lead-free chromium-plat.
Material sealing gasket	EPDM
Material earthing insert	brass lead-free chromium plat.
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP66 / IP68 (5 bar 30 min), IP69
Thread type	M
Ø Connection thread D	24
Lead	1,5
Length screw-in thread L	11 mm
Ø cable diameter min	9 mm
Ø cable diameter max	21 mm
Ø cable below cable shield max	7 mm
Key width SW1	33 mm
Key width SW2	33 mm
Collar diameter E1	36 mm
Collar diameter E2	36 mm
Total length TL	54 mm - 68 mm
Type of cable anchorage	A
Install. torques fitting	20 N m
Install. torques cap nut	20 N m
Impact category	6
Surface	Chromium-plated
WISKA-Order no.	10114074
Type	VMSKV-B 24-07

Your Contact:

WISKA America SRL

Mr. Alexander Bauer · Cervantes 911 c/Venezuela · Asunción · Paraguay

☎ +595-992-921719 · 📠 +49-4191-508-129

a.bauer@wiska.de · www.wiska.lat

Packing unit	5
Tariff number	85369010
EAN number	4007686326321
ETIM-Classification	EC000441
VG Registration number	E71E330/26002
VG Labeling	VG88846-4-A003-07-B-LF

28.08.2026

Your Contact:


WISKA America SRL

Mr. Alexander Bauer · Cervantes 911 c/Venezuela · Asunción · Paraguay

☎ +595-992-921719 · 📠 +49-4191-508-129

a.bauer@wiska.de · www.wiska.lat

Other technical data on request / subject to change without notice

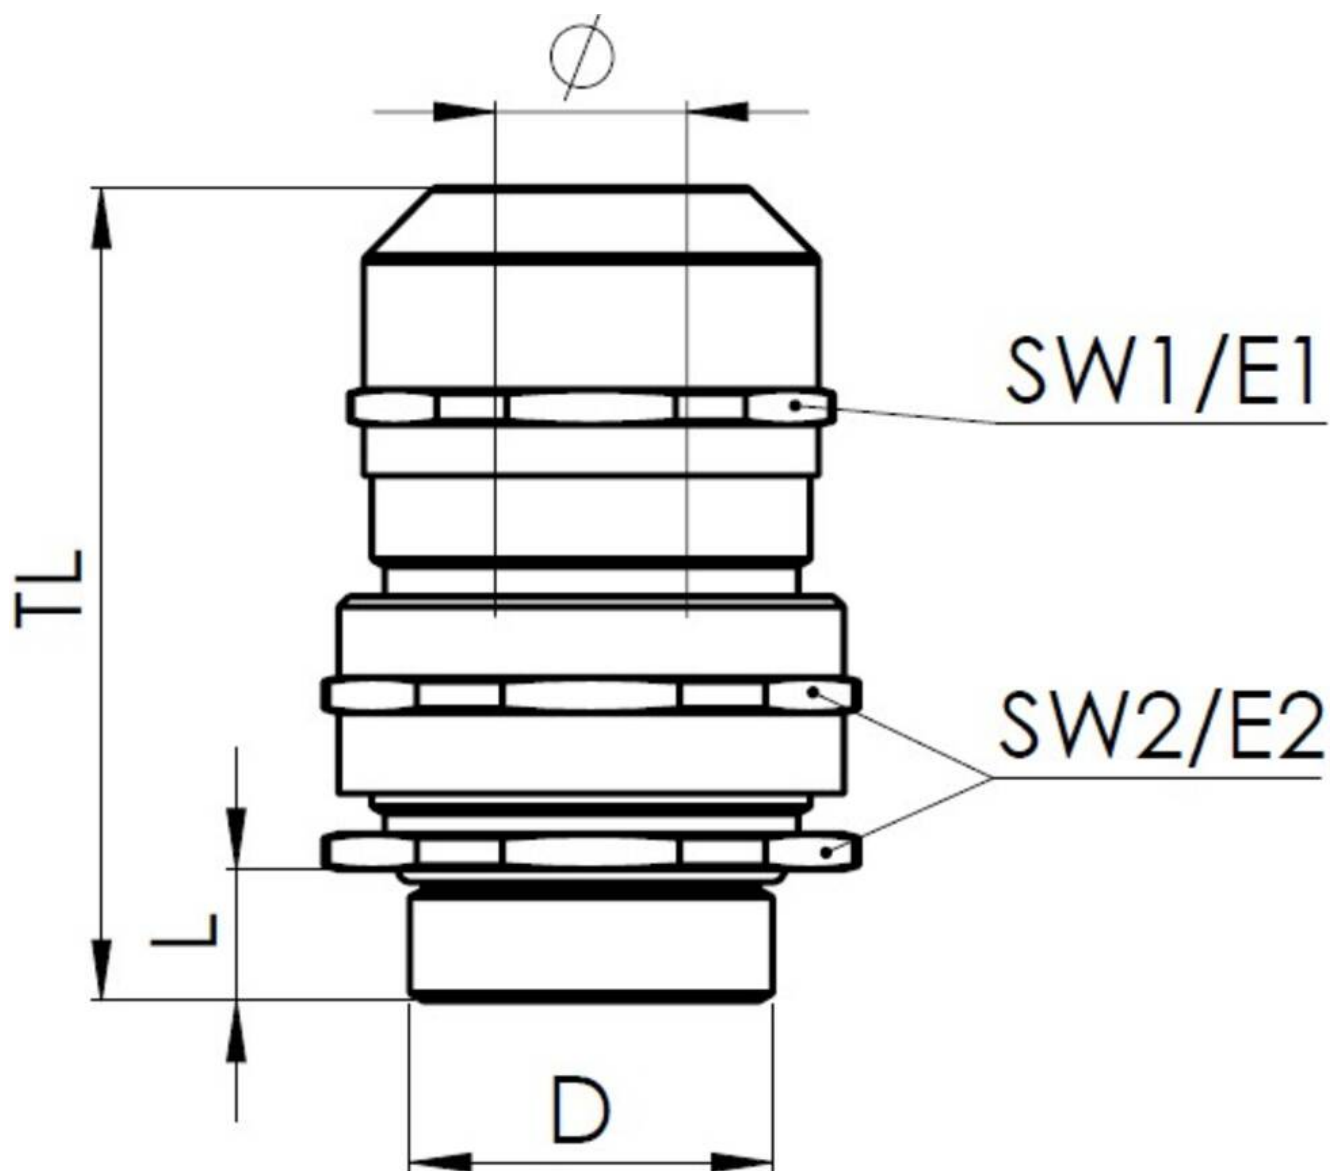

Your Contact:

WISKA America SRL

Mr. Alexander Bauer · Cervantes 911 c/Venezuela · Asunción · Paraguay

☎ +595-992-921719 · 📠 +49-4191-508-129

a.bauer@wiska.de · www.wiska.lat